



RTS LOW VOLTAGE WITH PDP WIRING DIAGRAM

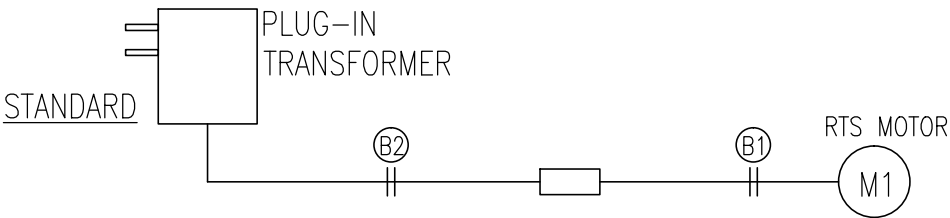

PDP-POWER DISTRIBUTION PANEL
AVAILABLE IN 5 MOTOR,10 MOTOR,
AND 20 MOTOR OPTIONS


STANDARD/OPTIONAL	
B1	24V DC POWER CABLE (2 CONDUCTORS) PART#: MLMDQ (STANDARD LENGTH 7.5 FT.)
B2	24V DC PLUG-IN TRANSFORMER 16 AWG (2 CONDUCTORS) STRANDED
B3	LOW VOLTAGE POWER CABLE (2 CONDUCTORS) STRANDED (BY OTHERS).

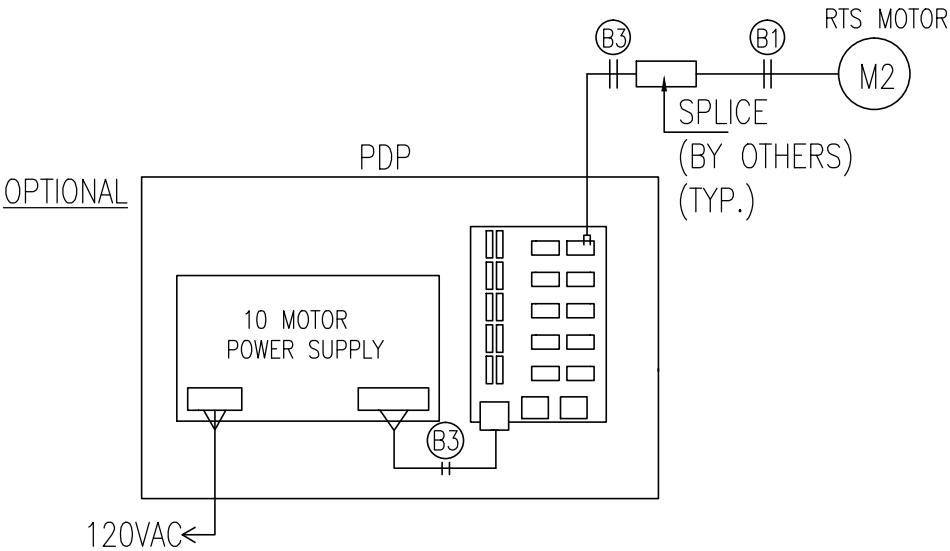

NOTE: ① SEE RTS CONTROLS AND RTS POWER OPTIONS FOR ADDITIONAL INFORMATION

NOTE: ② POWER MAY BE DAISY-CHAINED UP TO CIRCUIT CAPACITY.

NOTE: ③ SINGLE CHANNEL AVAILABLE

	TITLE RTS LOW VOLTAGE WITH PDP WIRING DIAGRAM	DWN BY N.W.	CKD BY M.P.
		DWG NO. WDRL-S	DATE 02/02/2017
		SCALE N.T.S.	SHEET NO. 1 OF 1