



inpro WT™

Commercial Shade Fabric

700 | 0% Openness

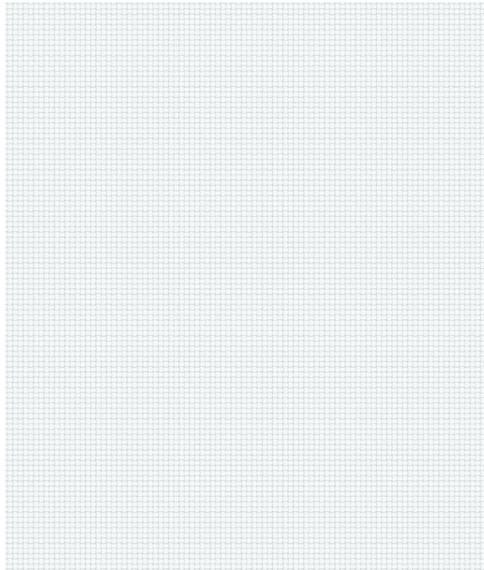

-10 White

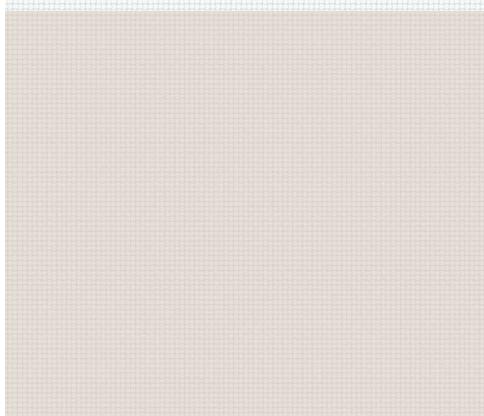


-04 Ivory



-230 Cotton



-81 Grey/Grey
(Back)

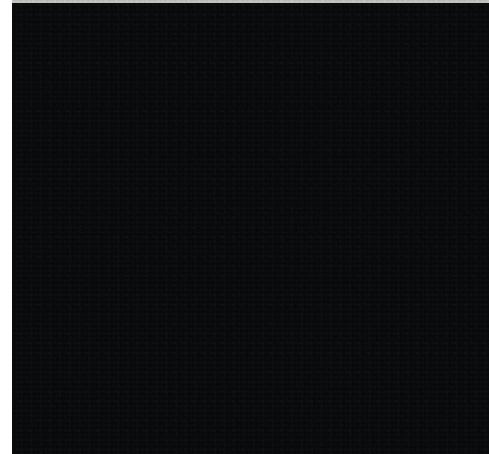

-83 Grey/White
(Back)

-93 Black/White
(Back)

Inpro WT™ Commercial Shade Fabric

700 | 0% Openness

When it comes to blackout fabrics, WT700 is the number one choice. This best selling fabric provides full coverage with easy maintenance and is the most economical solution for any bedroom, media room, or area requiring maximum light blockage.

Specifications and Certifications	
Width:	72"
Composition:	75% PVC, 25% Fiberglass
Openness Factor:	0%
UV Blockage:	100%
Weight (OZ/YD ²):	12
Thickness (IN):	0.013
Fire Classification:	CALIFORNIA U.S. TITLE 19 (SMALL SCALE); NFPA 701:2004 (TEST 1 SMALL SCALE), NFPA 701-89 LARGE SCALE TEST, FTMS 191 METHOD 5903
Air Quality Certification:	GREENGUARD and GREENGUARD GOLD
Lead-Free:	ASTM 4834-03+CSA. Can 600.08
Fungal Resistance:	ASTM G-21



Fabrics may vary slightly from colors of shown samples. Variances in fabric color are a normal part of fabric production as color mixtures may be slightly different from dye lot to dye lot.

For documentation of test results and certificates please visit inpro-shades.com.

For 8 x 10 memo samples of any of the fabrics featured on this card, please contact your Inpro WT™ Commercial Window Treatments Representative or visit inpro-shades.com.

CLEANING INSTRUCTIONS: Regular dusting and vacuuming recommended. For more thorough cleaning, use mild detergent and water, then rinse with water and allow to air dry. Spot test any cleaners before use. Do not bleach. Professional cleaning recommended.



Some fabrics within this series are printable! Visit inpro-shades.com for information about the **Printed Shade** program and learn how you can turn your images into custom shading solutions.

© Inpro Corporation

S80 W18766 Apollo Drive
Muskego, Wisconsin 53150 USA
inpro-shades.com
877.294.3580